


IPC-606B(B)

Industrial PC



Features

- Compact Aluminum Chassis, Fanless Design
- Intel Baytrail Celeron J1900 2.0-2.42G CPU
- HDMI+VGA Dual Independent Display
- DC 9~36V Wide Power Input
- GPIO 12 pin, 4 Input 3 Output
- Supports Win 7/ Win 8/ Win 10/ Linux OS



IPC-606B(B) is a compact dimension industrial computer with an Intel® J1900 processor, dual GbE LAN, 2 x COM ports, 4 x USB ports, 1x 4G. DC 9-36V wide power input, wide operating temperature, economic and reliable, it will be fit for IOT terminal and manufacture application.


Specifications

Processor	CPU	Intel Baytrail-D Celeron J1900, 2.0~2.42GHz, 4cores, 4threads, 2M cache, 22nm,TDP 10W	
	Cooling System	Fanless	
	Memory	Onboard DDR3L, max 8GB	
	Storage	mSATA SSD Full Size + SATA 2.5 inch SSD	
	I/O ports		3x USB2.0+1x USB3.0, Type-A
			COM: 2xRS232, DB9, 2x RS485 optional
			Dual Display: 1xHDMI (3840*2160 @30Hz) 1xVGA (1920*1200 @30Hz)
			Audio: 1xMic-in, 1x Line-out
Network(LAN)	2x Intel I211 10/100/1000Mbps Ethernet		
Power Voltage	Input Voltage	12V DC (2 Pin Aviation Connector) , optional 9V-36V DC	
	Control SW	1x Power SW (Rear), AT/ATX optional	
OS Support	OS Support	Microsoft Windows 7/ Windows 10/ Windows 11/ Linux	
Environment	Operating Temperature	-10°C ~ 60°C (14~ 140 °F) (extend temperature optional)	
	Storage Temperature	-20°C ~ 75°C (-4 ~ 167 °F) (extend temperature optional)	
Mechanical	Dimensions	(W*D*H): 190*156*46mm	

	Weight(G.W.)	N.W. 1.5KG (3.3lb)
	Color	Black
	Material	High Strength Aluminum Alloy
	Certification	CE / CCC
Custom Service	Custom Service	Custom BIOS, System Encryption, Custom LOGO

Dimensions

Unit: mm

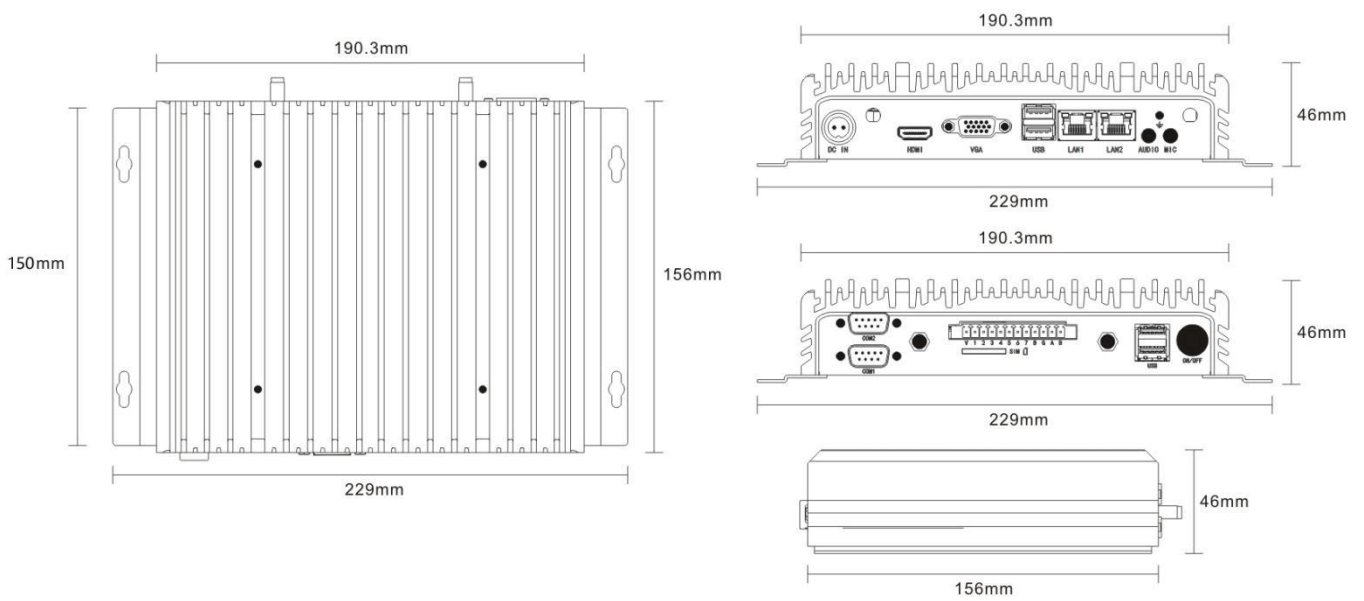



Packing List	Ordering Information
1x IPC-606B(B)	IPC-606B(B)-1: J1900 Version
1x Driver CD	Operating Systems
1x Power Adapter (12V 5A)	WIN7 32bit 64bit ENG/CN
Optional accessories	WIN10 32bit 64bit ENG/CN
Brackets	WIN11 32bit 64bit ENG/CN
Power Cable 2-pin 200cm	Linux Ubuntu 12.04/16.04/18.04