

UTC-S1992A

19 inch Industrial Panel PC



Features

- Aluminum die-casting chassis, fanless design
- Wireless Design
- 19 inch LED TFT LCD, capacitive touch
- intel 10th Gen. Core i3/i5/i7 CPU
- 6*COM, 2*LAN, 4*USB3.0, 2*USB2.0
- AT & ATX Model
- Front Panel IP65 Level
- DC 9~36V power input optional




UTC-S1992A is an intelligent, fanless panel PC, 19" Panel PC equipped with an Intel® 10th Gen. Core processor. Meeting the demands of harsh environments, in addition, the dual GbE LAN, 6 x serial ports, 6 x USB ports, make device connection and integration easy.


Specifications

Processor	CPU	Intel® i3-10110U Dual Core, 2.10-4.10 GHz 4M Cache, TDP 15W Intel® i5-10210U Quad Core, 1.60-4.20 GHz 4M Cache, TDP 15W Intel® i7-10510U Quad Core, 1.80-4.90 GHz 4M Cache, TDP 15W	
	Cooling System	Fanless	
	Memory	1x DDR4 2133Mhz SO-DIMM Sockets, up to 16GB	
	Storage	M.2 NVME SSD + mSATA SSD	
	I/O ports	USB:	4xUSB3.0+2xUSB2.0, Type-A
		COM:	6xRS232, DB9, 2*RS485/RS422 optional
		Dual Display:	1xHDMI (1920*1200 @30Hz) 1*VGA (1920*1200 @30Hz)
Network(LAN)	2x 10/100/1000Mbps Ethernet		
Input Voltage	Input Voltage	12V DC (3 Pin Phoenix Connector) , optional 9V-36V DC	
LCD Display	Display Type:	19 inch TFT LED Panel(LED Backlight)	
	Max. Resolution:	1280x1024 / 4:3	

	Luminance(cd/m ²)	300nits
Touchscreen	Touch Type	Capacitive Touch
OS Support	OS Support	Microsoft Windows 7/ Windows 10/Windows 11/ Linux
Environment	Operating Temperature	0°C ~ 50°C(14~ 140 °F)(extend temperature optional)
	Storage Temperature	-10°C ~ 60°C(-4 ~ 158 °F)
	Front Panel Protection	IP65 compliant
Mechanical	Dimensions	439.4x364.5x74mm Cutout Size: 418.4*343.5mm
	Weight	8.3 KG N.W.
	Color	Black
	Material	Aluminum + SUS
	Certification	CE / RoHS
Custom Service	Custom Service	Custom BIOS, System Encryption, Custom LOGO

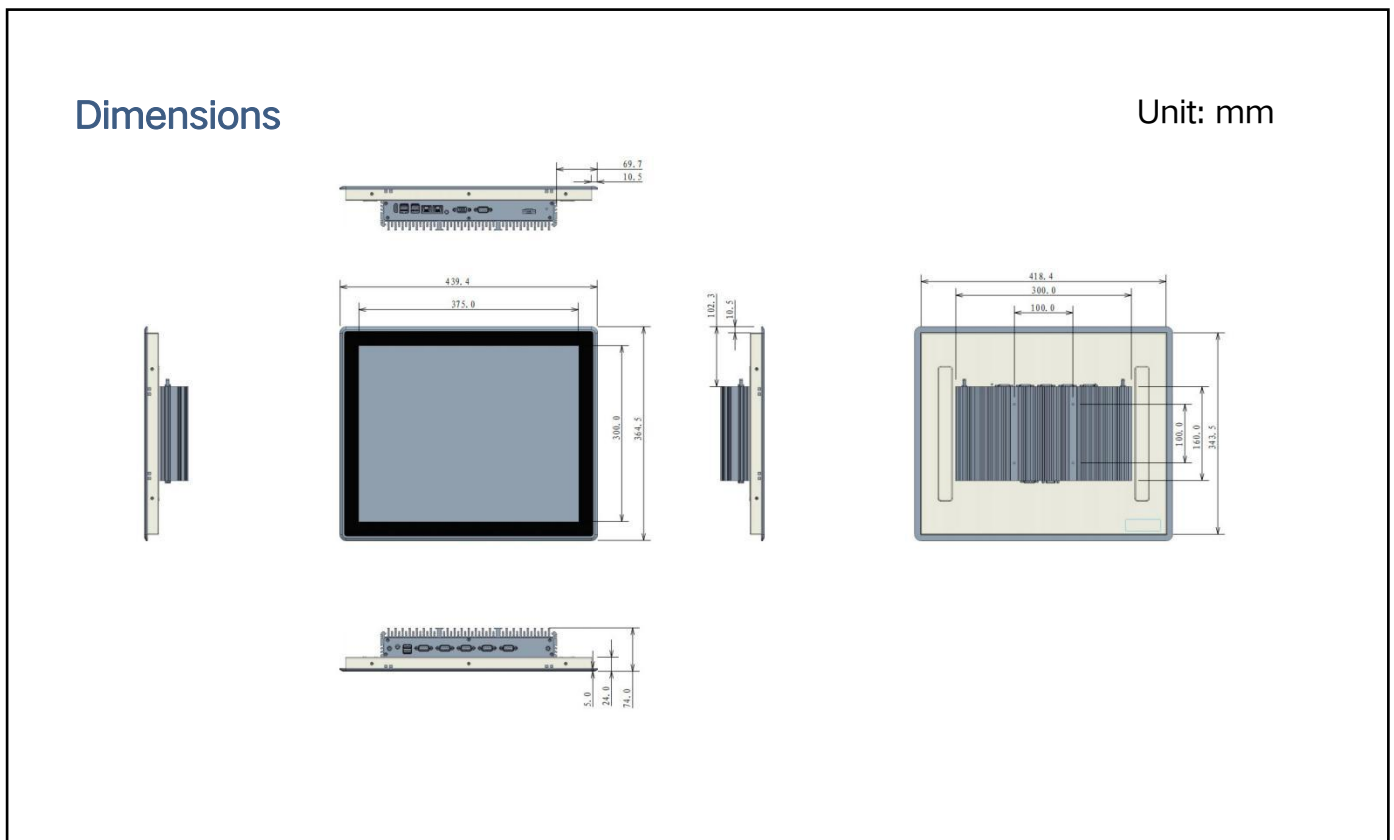



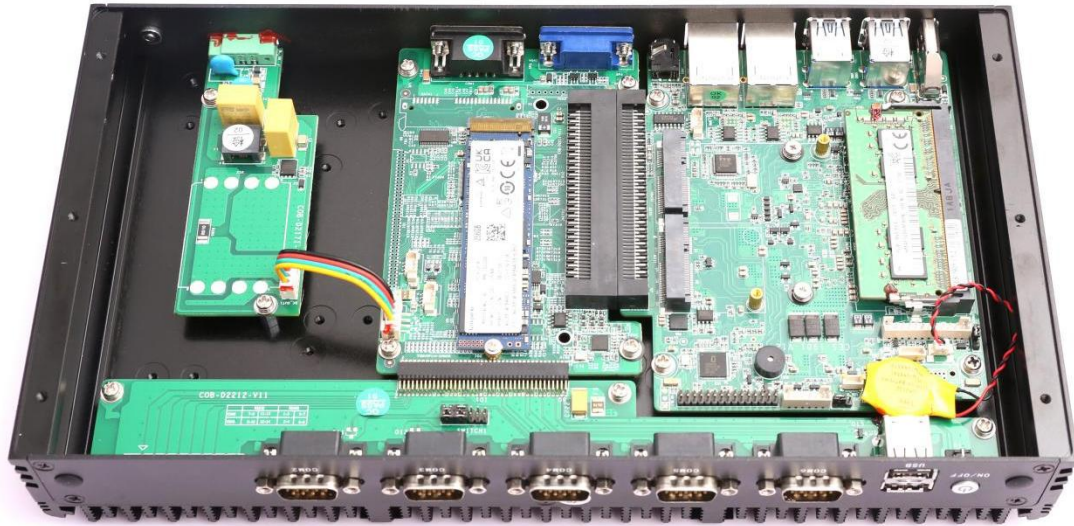

- Cable-less design and Board to Board design
- Highly compatible
- Modular design
- Easy operation: easy assembly and easy Maintenance
- Supports customization

Packing List	Ordering Information
1x UTC-S1982A	UTC-S1992A-1: I3-10110U Version
1x Power Adapter	UTC-S1992A-2: I5-10210U Version
Optional accessories	UTC-S1992A-3: I7-10510U Version
VESA Bracket	Operating Systems
Power Cable 3-pin 200cm	WIN7 32bit 64bit ENG/CN
	WIN10 32bit 64bit ENG/CN
	WIN11 32bit 64bit ENG/CN
	Linux Ubuntu 12.04/16.04/18.04