

UTC-W2192B

21.5 inch Industrial Panel PC



Features

- Aluminum die-casting chassis
- Wireless Design
- 21.5 inch TFT-LCD, capacitive touch
- Intel 10th Gen. Core I3/I5/I7 CPU
- 6*COM, 2*LAN, 4*USB3.0, 2*USB2.0
- AT & ATX Model
- Front Panel IP65 Level
- Brightness Adjustment




UTC-W2192B is an intelligent panel PC equipped with an Intel® 10th Gen. Core processor. Meeting the demands of harsh environments, in addition, the dual GbE LAN, 6 x serial ports, 6 x USB ports, make device connection and integration easy.

Processor	CPU	Intel® i3-10110U Dual Core, 2.10-4.10 GHz 4M Cache, TDP 15W Intel® i5-10210UQuad Core, 1.60-4.20 GHz 4M Cache, TDP 15W Intel® i7-10510UQuad Core, 1.10-4.90 GHz 4M Cache, TDP 15W
	Cooling System	Fanless
	Screen Protection	Fan Cooling
	Memory	1x DDR4 2133Mhz SO-DIMM Sockets, up to 16GB
	Storage	M.2 NVME SSD + mSATA SSD
	I/O ports	4xUSB3.0+2xUSB2.0,Type-A
		COM: 6xRS232, DB9, 2*RS485/RS422 optional
		Dual Display: 1xHDMI (1920*1200 @30Hz) 1xVGA (1920*1200 @30Hz)
		Audio: 1×Audio
		Expansion: MINI-PCIE
Network(LAN)	2x 10/100/1000Mbps Ethernet	
Input Voltage	Input Voltage	12V DC (3 Pin Phoenix Connector) , optional 9V-36V DC
	Control SW/LED	Power Button, AT & ATX Model

LCD Display	Display Type:	21.5inch TFT-LCD Panel
	Max. Resolution:	1920x1080 / 16:9
	Max.Luminance(cd/m ²)	1000nits Adjustment
Touchscreen	Touch Type	Projeted Capacitive Touch
OS Support	OS Support	Microsoft Windows 7/ Windows 10/ Windows 11/Linux
Environment	Operating Temperature	0°C ~ 50°C(14~ 140 °F)(extend temperature optional)
	Storage Temperature	-10°C ~ 60°C(-4 ~ 158 °F)
	Front Panel Protection	IP65 compliant
Mechanical	Dimensions	(W*D*H): 530x326.6x85.3mm; Mounting Cut out (W*D): 513x303mm
	Weight	7.8 KG N.W.
	Color	Black
	Material	Aluminum
	Certification	CE / RoHS
Custom Service	Custom Service	Custom BIOS, System Encryption, Custom LOGO

Specifications

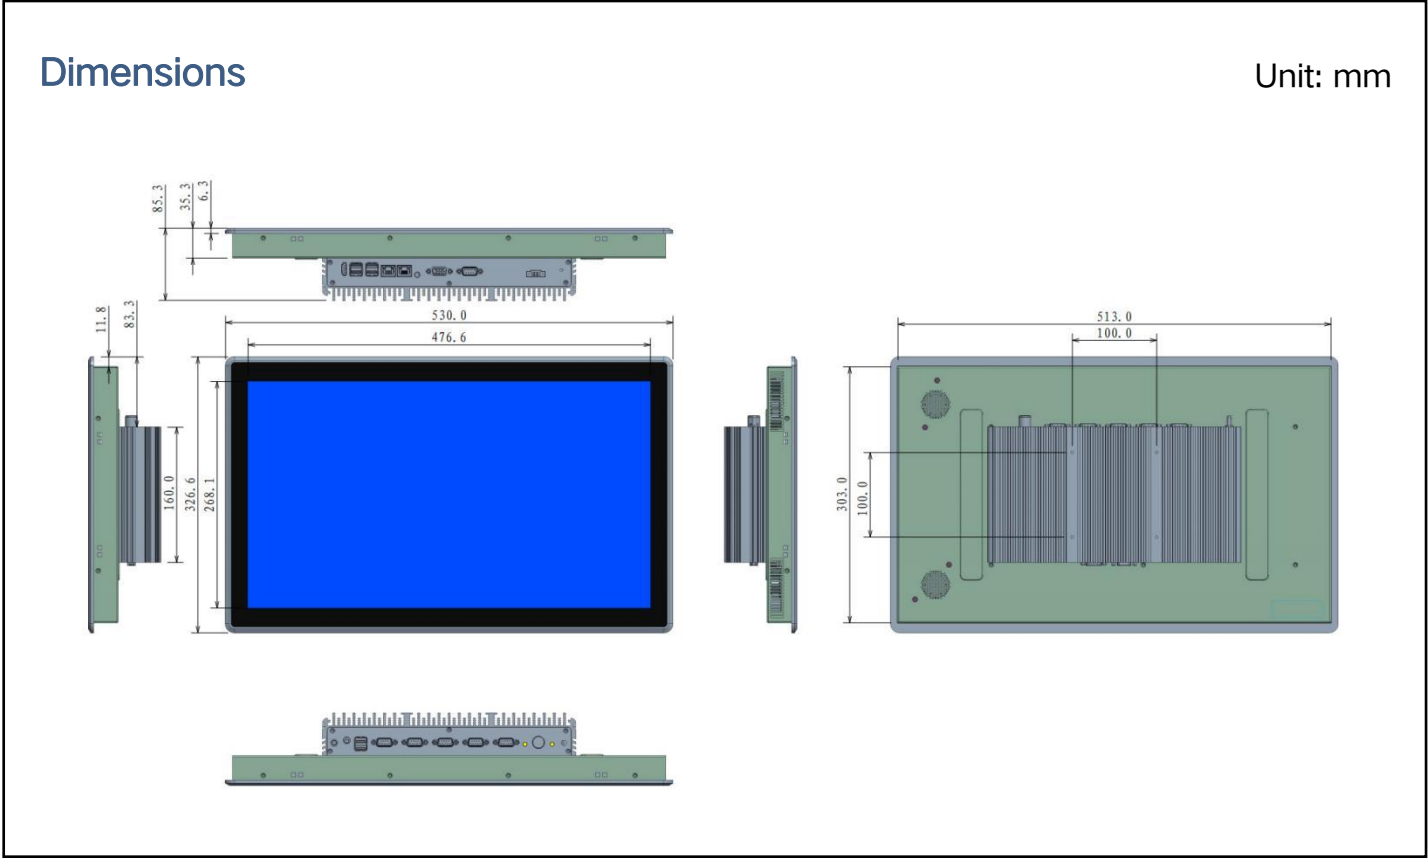



Packing List	Ordering Information
1x UTC-W2192B	UTC-W2192B-1: i3-10110U Version
1x Power Adapter	UTC-W2192B-2: i5-10210U Version
Optional accessories	UTC-W2192B-3: i7-10510U Version
VESA Bracket	Operating Systems
Power Cable 3-pin 200cm	WIN7 32bit 64bit EN/CN
	WIN10 32bit 64bit EN/CN
	WIN11 32bit 64bit EN/CN
	Linux Ubuntu 12.04/16.04/18.04