

- Intel® Celeron® Processor J1900
- Intel® Celeron® Processor J6412

- Intel® Core™ 10th Processor
- Intel® Core™ 12th Processor

► Introduction



The EPC-207B industrial PC showcases a fanless embedded design powered by CESIPC's proprietary LEGO MODE technology. **The device provides 4 independent RS-485 serial ports through a DB37 (D-Sub 37-pin) connector.** equipped with Inter Celeron J6412 processor, delivering superior performance. Engineered for reliability, the EPC series ensures high functionality and meets rigorous protection standards, making it an optimal solution for mission-critical industrial applications.

- ★ Multi-platform, Multi-tier CPU options
- ★ Board-to-board Design for Stable Performance

- ★ LEGO MODE with Customizable Function Cards
- ★ i-Door Technology for Efficient, Tailored Solutions

► Specifications

System Core

CPU	Celeron J1900	Celeron J6412	i3-10110U	i5-10210U	i7-10510U	i3-1215U	i5-1235U	i7-1250U
Cores	4	4	2	4	4	6	10	10
Threads	4	4	4	8	8	8	12	12
Frequency	2.0-2.4	2.0-2.6	2.1-4.1	1.6-4.2	1.8-4.9	1.2-4.4	1.3-4.4	1.1-4.7
Cache	2MB	1.5MB	4MB	6MB	8MB	10MB	12MB	12MB
TDP	10W	10W	15W	15W	15W	15W	15W	9W
Graphics	HD	UHD	UHD	UHD	UHD	UHD Graphics	Iris Xe	Iris Xe
Memory	4-8GB DDR3L	4-16GB DDR4	4-32GB DDR4			8-32GB DDR5		
Storage	1 x mSATA SSD		1 x mSATA/ 1 x M.2 SSD			2 x M.2 SSD		

Power Supply

DC Input	1 × 3-pin Pluggable Terminal Block for 12V DC 9-36V DC Optional
Power Button	1x ATX Power On/Off Button
Booting	1x AT/ATX Mode Switch (Internal settings)

Wireless Communication

Wi-Fi	Intel N6235 300Mbps, 802.11a/b/g/n, 2.4G / 5G
Wireless Network	4G LTE Full Netcom Module

- Intel® Celeron® Processor J1900
- Intel® Celeron® Processor J6412

- Intel® Core™ 10th Processor
- Intel® Core™ 12th Processor

I / O Ports

CPU	Celeron J1900	Celeron J6412	i3-10110U	i5-10210U	i7-10510U	i3-1215U	i5-1235U	i7-1250U
USB 2.0	5	2	2	2	2	2	2	2
USB 3.0	1	2	4	4	4	4	4	4
RS232	2	2	2	2	2	2	2	2
RS485	1	2	1	1	1	1	1	1
VGA	1	1	1	1	1	1	1	1
HDMI	1	1	1	1	1	1	1	1
Ethernet	2 x Intel I210	2 x Intel I210	2 x Intel I210	2 x Intel I210	2 x Intel I210	2 x Intel I210	2 x Intel I210	2 x Intel I210
Audio	3.5mm TRRS	3.5mm TRRS	3.5mm TRRS	3.5mm TRRS	3.5mm TRRS	3.5mm TRRS	3.5mm TRRS	3.5mm TRRS
DB37	4RS232/ 4RS485	4RS232/ 4RS485	4RS232/ 4RS485	4RS232/ 4RS485	4RS232/ 4RS485	4RS232/ 4RS485	4RS232/ 4RS485	4RS232/ 4RS485

Environmental

Dimension	229.0 (W) × 160.0 (D) × 79 (H) mm
Installation dimensions	219.0 (W) × 100.0 (D)
Weight	KG G.W.
Material	6063 High-Strength Aluminum Alloy
Mechanical	Aluminum Extrusion + Sheet Metal
Construction	Structure
Mount	Bracket Mount / VESA Mount
Clear CMOS Switch	1x Clear CMOS Switch

Mechanical

Operating Temperature	0~50°C (-40~70°C Optional)
Storage Temperature	-10~60°C
Relative Humidity	10%~90% , Non-condensing
EMC	CE, FCC (According to EN 55032 & EN 55035)
Factory	EN IEC 61000-3-2
ODM	ISO9001: 2015
MTBF	BIOS / Boot on LOGO / OEM 60,000 Hours

OS

Windows	Windows 10 / Windows 11 Note: Celeron J1900 can support Windows 7
Linux	Ubuntu 16.04 / 18.04 / 20.04 / 22.04

► Product Images




- Intel® Celeron® Processor J1900
- Intel® Celeron® Processor J6412

- Intel® Core™ 10th Processor
- Intel® Core™ 12th Processor

► Applications



► Product Sizes

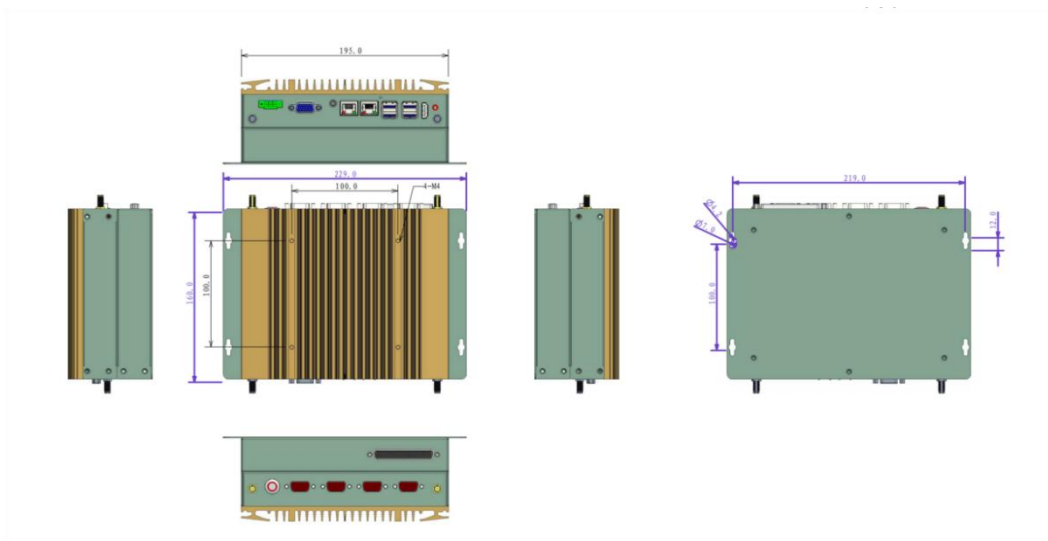

► Product Selection

NO.	Model	Product Part Number	Describe Information	Standard Memory	Standard Storage
1	EPC-206B		Intel® Celeron® Processor J1900 Processor	4GB	SSD 128GB
2	EPC-207B	C10.02.05.001	Intel® Celeron® Processor J6412 Processor	8GB	SSD 256GB
3	EPC-209B		Intel® Core™ i3-10110U Processor	8GB	SSD 256GB
4	EPC-209B		Intel® Core™ i5-10210U Processor	8GB	SSD 256GB
5	EPC-209B		Intel® Core™ i7-10510U Processor	8GB	SSD 256GB
6	EPC-202B		Intel® Core™ i3-1215U Processor	8GB	SSD 256GB
7	EPC-202B		Intel® Core™ i5-1235U Processor	8GB	SSD 256GB
8	EPC-202B		Intel® Core™ i7-1250U Processor	8GB	SSD 256GB

Note: CPU model may vary. Contact sales for details