

- Intel® Celeron® Processor J1900
- Intel® Celeron® Processor J6412

- Intel® Core™ 10th Processor
- Intel® Core™ 12th Processor

► Introduction



EPC-S1522B is a high-performance 15-inch industrial PC with a fanless design, supporting Intel® 12th Gen Core™ i3/i5/i7 processors. **Based on the LEGO-Mode design, customized with 5 Gigabit LAN ports and an intelligent thermal management system.** Designed for demanding environments such as semiconductor, machine vision, AGV, medical imaging, and energy automation.

- ★ Intel® 12th Gen Core™ processor support
- ★ Five Gigabit LAN ports and versatile I/O

- ★ Intelligent thermal control with hot-swappable fan
- ★ Perfect for semiconductor and machine vision

► Specifications

System Core

CPU	Celeron J1900	Celeron J6412	Core i3-10110U	Core i5-10210U	Core i7-10510U	Core i3-1215U	Core i5-1235U	Core i7-1250U
Cores	4	4	2	4	4	6	10	10
Threads	4	4	4	8	8	8	12	12
Frequency	2.0-2.4	2.0-2.6	2.1-4.1	1.6-4.2	1.8-4.9	1.2-4.4	1.3-4.4	1.1-4.7
Cache	2MB	1.5MB	4MB	6MB	8MB	10MB	12MB	12MB
TDP	10W	10W	15W	15W	15W	15W	15W	9W
Graphics	HD	UHD	UHD	UHD	UHD	UHD Graphics	Iris Xe	Iris Xe
Memory	4-8GB DDR3L	4-16GB DDR4	4-32GB DDR4			8-32GB DDR5		
Storage	1 x mSATA SSD		1 x mSATA/ 1 x M.2 SSD			2 x M.2 SSD		

Power Supply

DC Input	1×2-pin Aviation Power Connector for 12V DC 9-36V DC Optional
Power Button	1x ATX Power On/Off Button
Booting	1x AT/ATX Mode Switch (Internal settings)

Wireless Communication

Wi-Fi	Intel N6235 300Mbps, 802.11a/b/g/n, 2.4G / 5G
Wireless Network	4G LTE Full Netcom Module

- Intel® Celeron® Processor J1900
- Intel® Celeron® Processor J6412

- Intel® Core™ 10th Processor
- Intel® Core™ 12th Processor

I / O Ports

CPU	Celeron J1900	Celeron J6412	Core i3-10110U	Core i5-10210U	Core i7-10510U	Core i3-1215U	Core i5-1235U	Core i7-1250U
USB 2.0	5	4	2	2	2	2	2	2
USB 3.0	1	2	4	4	4	4	4	4
RS232	3	3	3	3	3	3	3	3
RS485	/	/	/	/	/	/	/	/
VGA	/	/	/	/	/	/	/	/
HDMI	1	1	1	1	1	1	1	1
Ethernet	5 x Intel I210							
Audio	3.5mm TRRS							

Display

LCD Size	15 inch Panel Size
Resolution	1024 x 768 / 4:3
Brightness (cd/m ²)	300
Contrast Ratio	500 : 1
Backlight LED Life Time	50,000 hrs (LED Backlight)

Touch Panel

Touchscreen Type	Projected Capacitive Touch Resistive 5-wire (Optional)
------------------	---

Mechanical

Dimension	359.9(W)×283.9(D)×75.1(H)mm
Cutout Size	342.4×269.4mm
Weight	7 KG N.W.
Material	6063 High-Strength Aluminum Alloy
Mechanical Construction	Aluminum Extrusion + Sheet Metal Structure
Mount	Wall Mount / VESA Mount
Clear CMOS Switch	1x Clear CMOS Switch

Environmental

Protection	Front Panel IP65 Compliant
Operating Temperature	0~50°C (-40~70°C Optional)
Storage Temperature	-10~60°C
Relative Humidity	10%~90% , Non-condensing
EMC	CE, FCC (According to EN 55032 & EN 55035)
Factory	EN IEC 61000-3-2
ODM	ISO9001: 2015
MTBF	60,000 Hours
Thermal Management	BIOS / Boot on LOGO / OEM Hot-swappable fan with intelligent thermal control system

OS

Windows	Windows 10 / Windows 11 Note: Celeron J1900 can support Windows 7
Linux	Ubuntu 16.04 / 18.04 / 20.04 / 22.04

- Intel® Celeron® Processor J1900
- Intel® Celeron® Processor J6412

- Intel® Core™ 10th Processor
- Intel® Core™ 12th Processor


▶ Product Images



▶ Applications



▶ Product Sizes

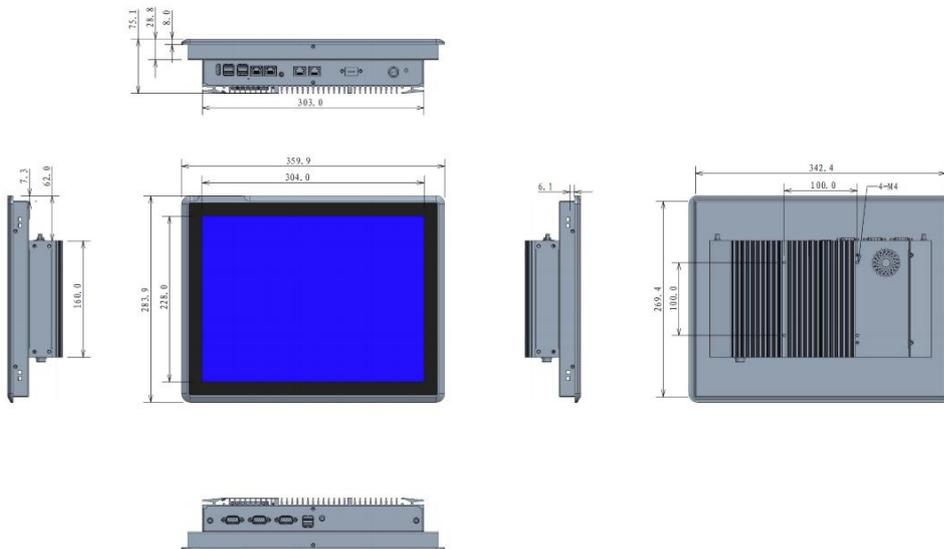



- Intel® Celeron® Processor J1900
- Intel® Celeron® Processor J6412

- Intel® Core™ 10th Processor
- Intel® Core™ 12th Processor

▶ Product Selection

NO.	Model	Product Part Number	Describe Infomation	Standard Memory	Standard Storage
1	EPC-S1562B		Intel® Celeron® Processor J1900 Processor	4GB	SSD 128GB
2	EPC-S1572B		Intel® Celeron® Processor J6412 Processor	8GB	SSD 256GB
3	EPC-S1592B		Intel® Core™ i3-10110U Processor	8GB	SSD 256GB
4	EPC-S1592B		Intel® Core™ i5-10210U Processor	8GB	SSD 256GB
5	EPC-S1592B		Intel® Core™ i7-10510U Processor	8GB	SSD 256GB
6	EPC-S1522B		Intel® Core™ i3-1215U Processor	8GB	SSD 256GB
7	EPC-S1522B	C11.03.04.011	Intel® Core™ i5-1235U Processor	16GB	SSD 256GB
8	EPC-S1522B		Intel® Core™ i7-1250U Processor	8GB	SSD 256GB

Note: CPU model may vary. Contact sales for details