



Features

- Aluminum die-casting chassis, fanless design
- Wireless Design
- 10.4 inch LED TFT LCD, capacitive touch
- Intel Celeron J1900 2.0-2.42G CPU
- 3*COM, 2*LAN, 5*USB2.0, 1*USB3.0
- AT & ATX Model
- Front Panel IP65 Level
- DC 9~36V power input optional



UTC-S1062A is an intelligent, fanless panel PC, 10.4" Panel PC equipped with an Intel® Bay Trail processor. Meeting the demands of harsh environments, in addition, the dual GbE LAN, 3 x serial ports, 6 x USB ports, make device connection and integration easy.


Specifications

Processor	CPU	Intel Baytrail-D Celeron J1900, 2.0~2.42GHz, 4cores, 4threads, 2M cache, 22nm,TDP 10W
	Cooling System	Fanless
	Memory	Single Socket, 4GB-8GB DDR3L
	Storage	mSATA SSD Full Size+SATS 2.5"SSD
	I/O ports	5xUSB2.0+1xUSB3.0, Type-A
		COM: 3xRS232, DB9, 2*RS485/RS422 optional
		Dual Display: 1xHDMI (1920*1200 @30Hz) 1xVGA (1920*1200 @30Hz)
		Audio: 1×Mic-in, 1x Line-out
Input Voltage	Network(LAN)	Wi-Fi: 802.11a/g/n, 2x2 Antenna, 2.4/5 GHz, 300 Mbps Max Speed 2x 10/100/1000Mbps Ethernet
	Input Voltage	12V DC(3 Pin Phoenix Connector), optional 9V~36V DC

	Control SW/LED	Power Button, AT & ATX Model
LCD Display	Display Type:	10.4 inch TFT LED Panel(LED Backlight)
	Max. Resolution:	1024x768 / 4:3
	Luminance(cd/m ²)	300nits
Touchscreen	Touch Type	Capacitive Touch
OS Support	OS Support	Microsoft Windows 7/ Windows 10/Windows 11/ Linux
Environment	Operating Temperature	0°C ~ 50°C(14~ 140 °F)(extend temperature optional)
	Storage Temperature	-10°C ~ 60°C(-4 ~ 158 °F)
	Front Panel Protection	IP65 compliant
Mechanical	Dimensions	(W*H*D): 260.5x207.7x61mm cutout size: 248*192mm
	Weight	2.6 KG (N.W.)
	Color	Black
	Material	Aluminum
	Certification	CE / RoHS
Custom Service	Custom Service	Custom BIOS, System Encryption, Custom LOGO

Dimensions

Unit: mm

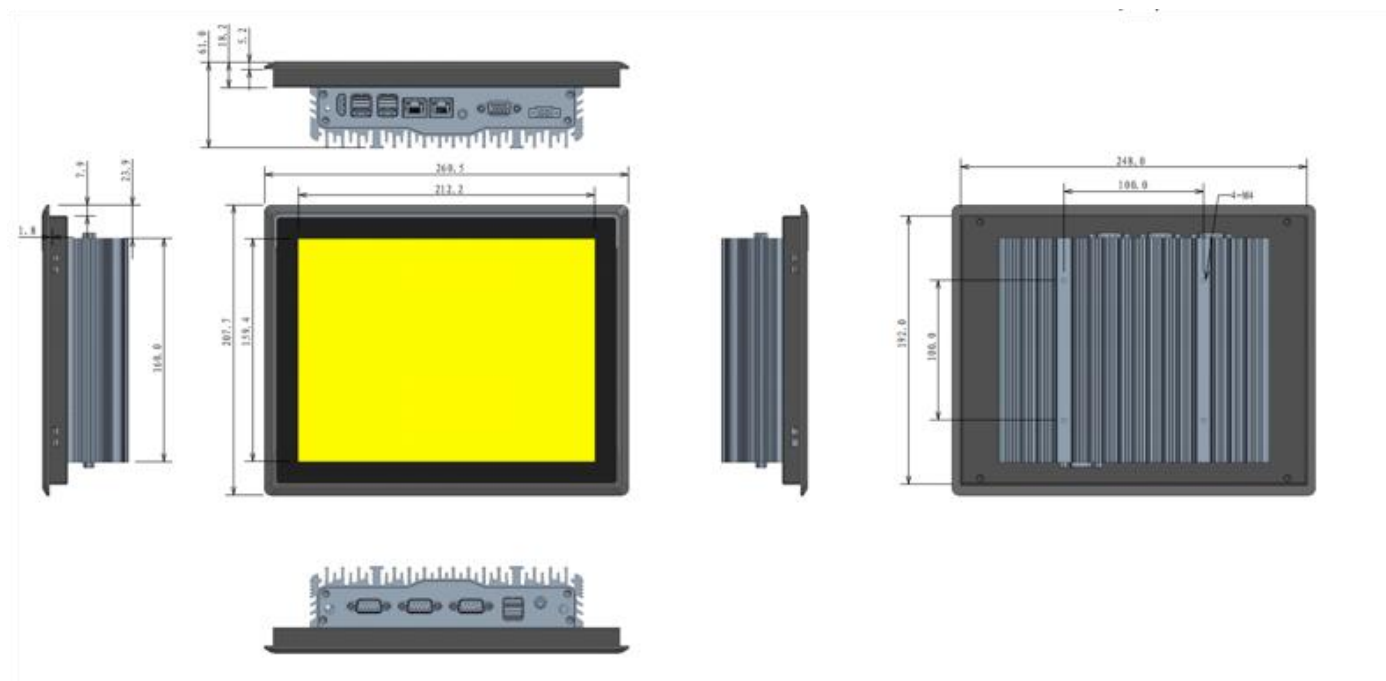



Packing List	Ordering Information
1x UTC-S1062D	UTC-S1062D-1: Projected Capacitive Touch Version
1x Power Adapter	Operating Systems
VESA Bracket & Buckles	WIN7 32bit 64bit EN/CN
Optional accessories	WIN10 32bit 64bit EN/CN
Power Cable 3-pin 200cm	WIN11 32bit 64bit EN/CN
	Linux Ubuntu 12.04/16.04/18.04